





DPP750 Indicator

Filtertechnik Ltd, I Central Park, Lenton Lane, Nottingham, NG7 2NR. United Kingdom. t: +44 (0)115 9003 600 e:sales@filtertechnik.co.uk www.filtertechnik.co.uk





DPP750





Example Usage

Available Pressure Ranges

- (8, 15, 22, other upon request)
- Optional switch and base

Specs

Safe to 300 psi


Safe to 150 F

Viton Seals

2 color indicator


Glass filled nylon.

3% accuracy

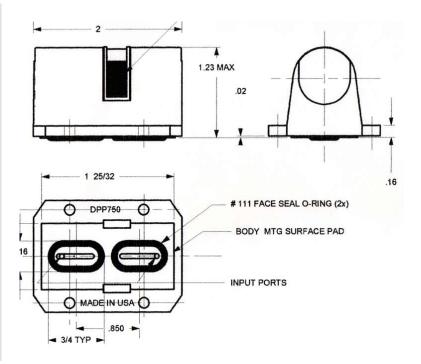





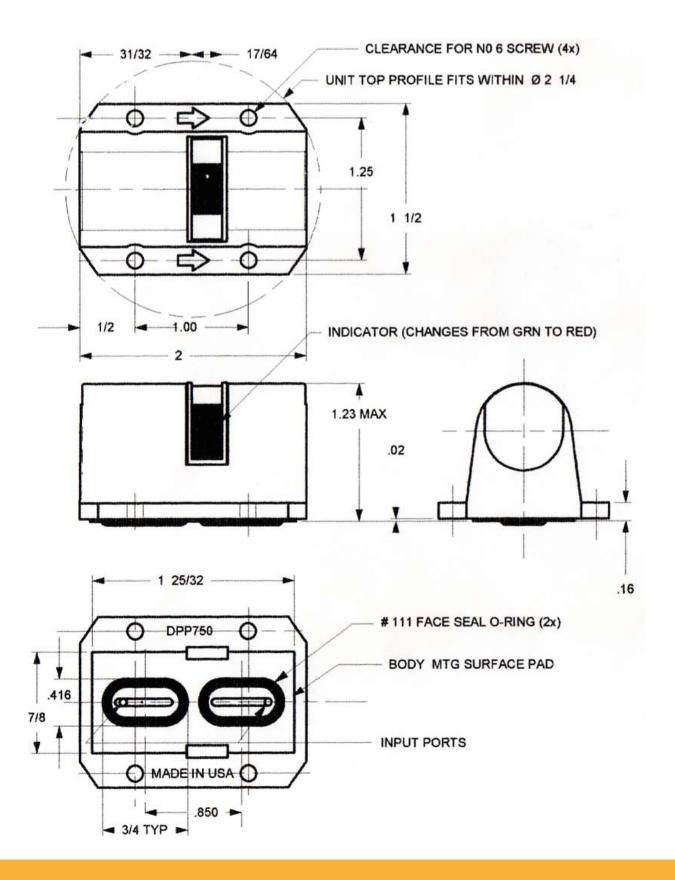

Filtertechnik Ltd, I Central Park, Lenton Lane, Nottingham, NG7 2NR. United Kingdom. t: +44 (0)115 9003 600 e:sales@filtertechnik.co.uk www.filtertechnik.co.uk






Bases and Switches

Simple and Effective

The DPP750 uses two o-rings and 4 screws to secure it into a filter head. However, it can also be connected to our "mounting base" that supplies 1/8" NPT connections and panel mount ability.

It can also feature an electrical switch that triggers when the indicators turns red.

These options make it great for filters and compressors!

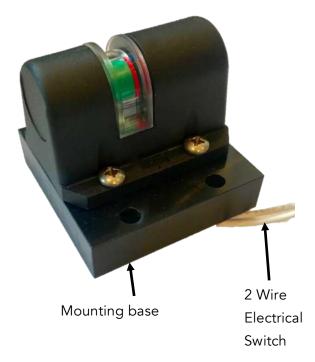

Filtertechnik Ltd, I Central Park, Lenton Lane, Nottingham, NG7 2NR. United Kingdom. t: +44 (0)115 9003 600 e:sales@filtertechnik.co.uk www.filtertechnik.co.uk