




Sales Drawing of a Schroeder NNZ10 Element



OD: 1.8 (44mm)
ID: 0.8 (20 mm)

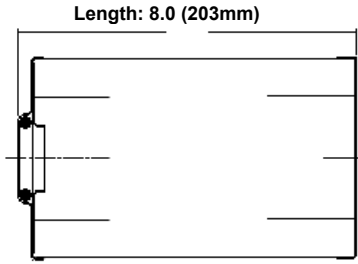

SECTION A-A



OD: 1.8 (44mm)

ELEMENT SPECIFICATIONS

Flow Direction: OUTSIDE-IN
Seal Material: BUNA N
Seal Type: O-RING
Bypass Valve: NONE
End Cap Material: STEEL
Support Tube Material: STEEL

Media Type: SYNTHETIC MICROGLASS
Micron Rating: 10
Element Collapse Rating: 150 PSID
Operating Temperature Range: -20 F TO 225 F (-29 C TO 107 C)
Dirt Holding Capacity: 15 gms

EFFICIENCY RATING PER ISO 16889

$\beta_{x(c)} \geq 75$ (98.7%) = 6.8 $\beta_{x(c)} \geq 100$ (99.0%) = 7.1 $\beta_{x(c)} \geq 200$ (99.5%) = 8.0 $\beta_{x(c)} \geq 1000$ (99.9%) = 10.0

Notes

These drawings, specifications and the ideas contained herein are the exclusive property of Schroeder Industries and are confidential. These documents shall not be copied or reproduced in part or in full as a basis of design, manufacture or sale; and shall not be used in any way detrimental to the interest of this company. They are subject to return upon request.

Schroeder
INDUSTRIES LLC
www.schroederindustries.com